

BOTTOMJET™

●●● BOTTOM-ENTRY AGITATOR WITH MECHANICAL SEAL


- Satisfy a variety of mixing requirement
- Optional full tank maintenance system
- Optional CIP cleaning satisfied
- Comply with relevant explosion-proof standards

Power : reaches 200kW

Specification: JET bottom-entry installation

Seal: Mechanical

Operation surroundings: Normal temp to 150°C
Vaccum to 16bar

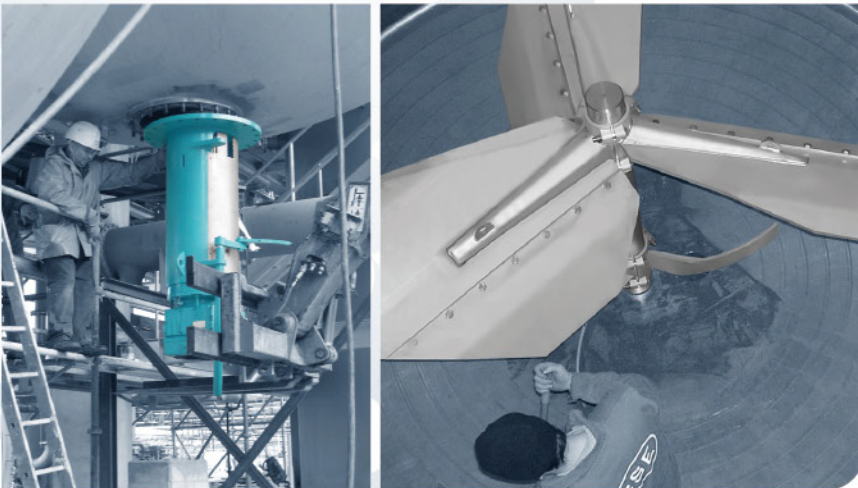

Applications: Petrochemical