


AGIPRO™

●●●● SMALL-SIZED TOP-ENTRY AGITATOR




- Multi-purpose
- Energy-conservation and high efficiency
- Simple structure
- Easy to handle

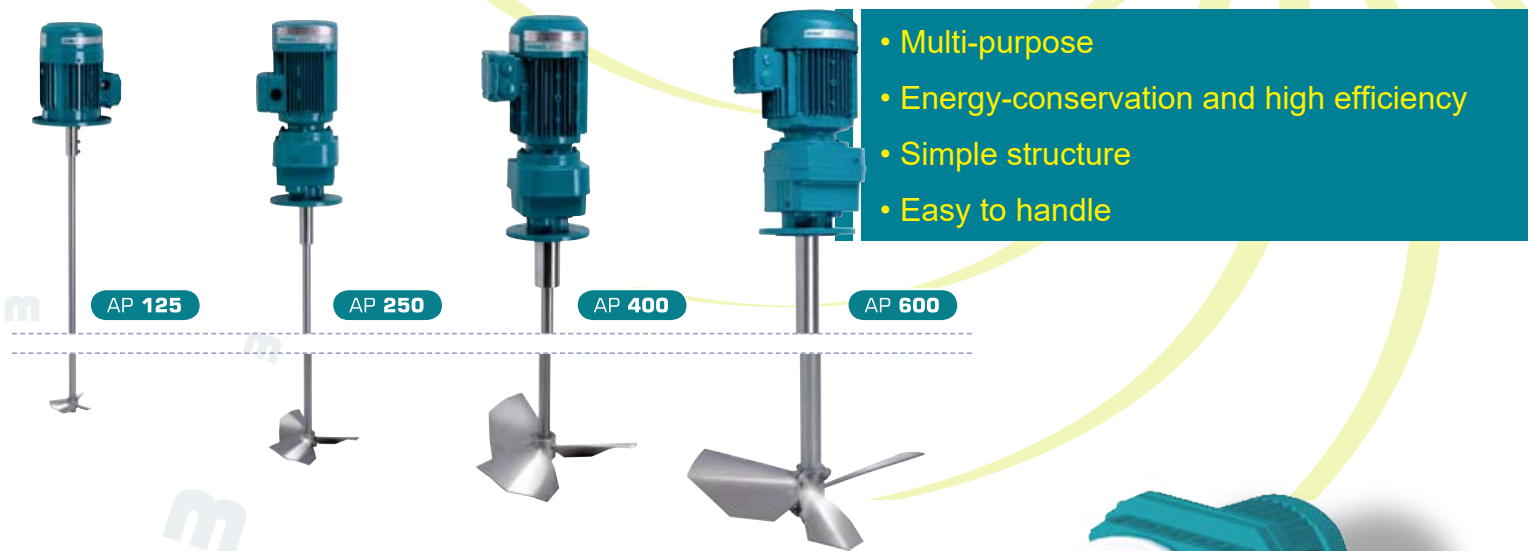

MIXING
HOMOGENIZATION
SUSPENDING SOLIDS

Tank volume: 0.5 m³~8 m³

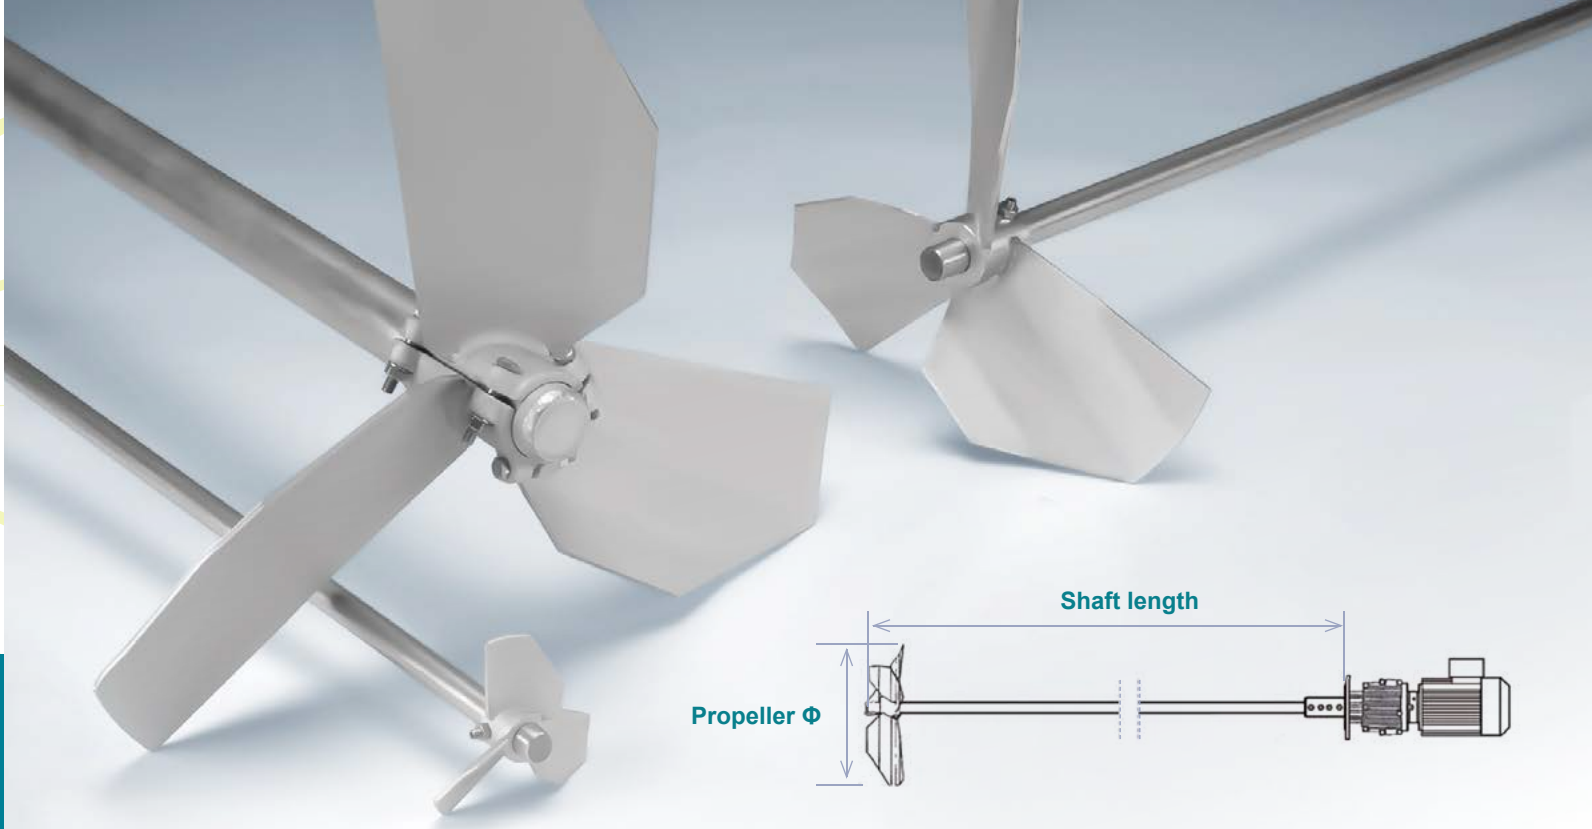

Type	Tank volume m³	Propeller Ø mm	Rotation speed rpm	Flow velocity m/s	Pumping flow m³/h	Installed power kW	Shaft length mm	Weight kg	Square flange mm
AP125	0.5 to 1.5	125	1425	3.57	158	0.75	1200	15	250 x 250
AP250	1.5 to 3	250	280	1.48	261	0.37	1500	20	
AP400	3 to 5	400	145	1.33	600	0.55	1500	30	
AP600	5 to 8	600	123	1.17	1196	1.1	2000	60	400 x 400

Voltage 380V three-phase - 50 Hz - protection degree IP55

Quick selection graph

Suitable for all liquid mixtures (viscosity 1 to 4000CP)

Water Treatment	✓ Conditioning in tanks ✓ Flocculation ✓ Reagent preparation ✓ Coagulation	
Industrial effluent Treatment	✓ Neutralisation ✓ PH adjustment ✓ Urea preparation	
Paint	✓ Paint preparation ✓ Aqueous phase	
Paper	✓ Varnish preparation (starch + dyes)	
Other industries	✓ All process works that need to keep the product suspended	

Available accessories

- Stainless steel clamp - suitable for tank edge installation
- Stainless steel mounting base - suitable for tank top mounting
- Steel galvanized brackets - suitable for container top mounting
- Rubber, various polymer coatings - suitable for special conditions such as corrosion and abrasion

