

SIDEJET™



●●●● FIXED SIDE-ENTRY AGITATOR




- Suitable for large capacity tank and dangerous, high viscosity and corrosive mixed products
- High-quality mechanical seals guarantee the reliability of sealing
- Special structural design for quick maintenance

STORAGE
HOMOGENIZATION & SUSPENDING SOLIDS
MIXING
TEMPERATURE HOLDING

Applications: Chemical, Petrochemical,
Agricultural products and Water treatment industry

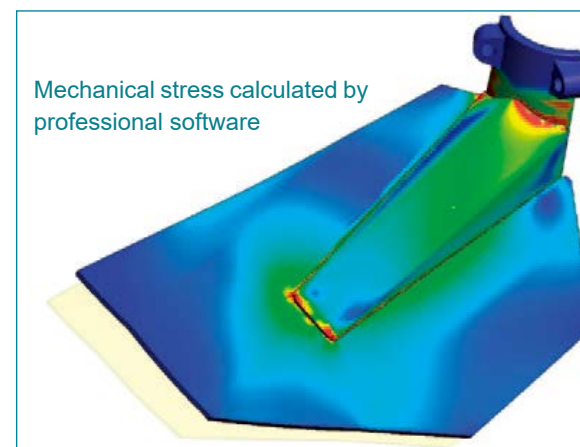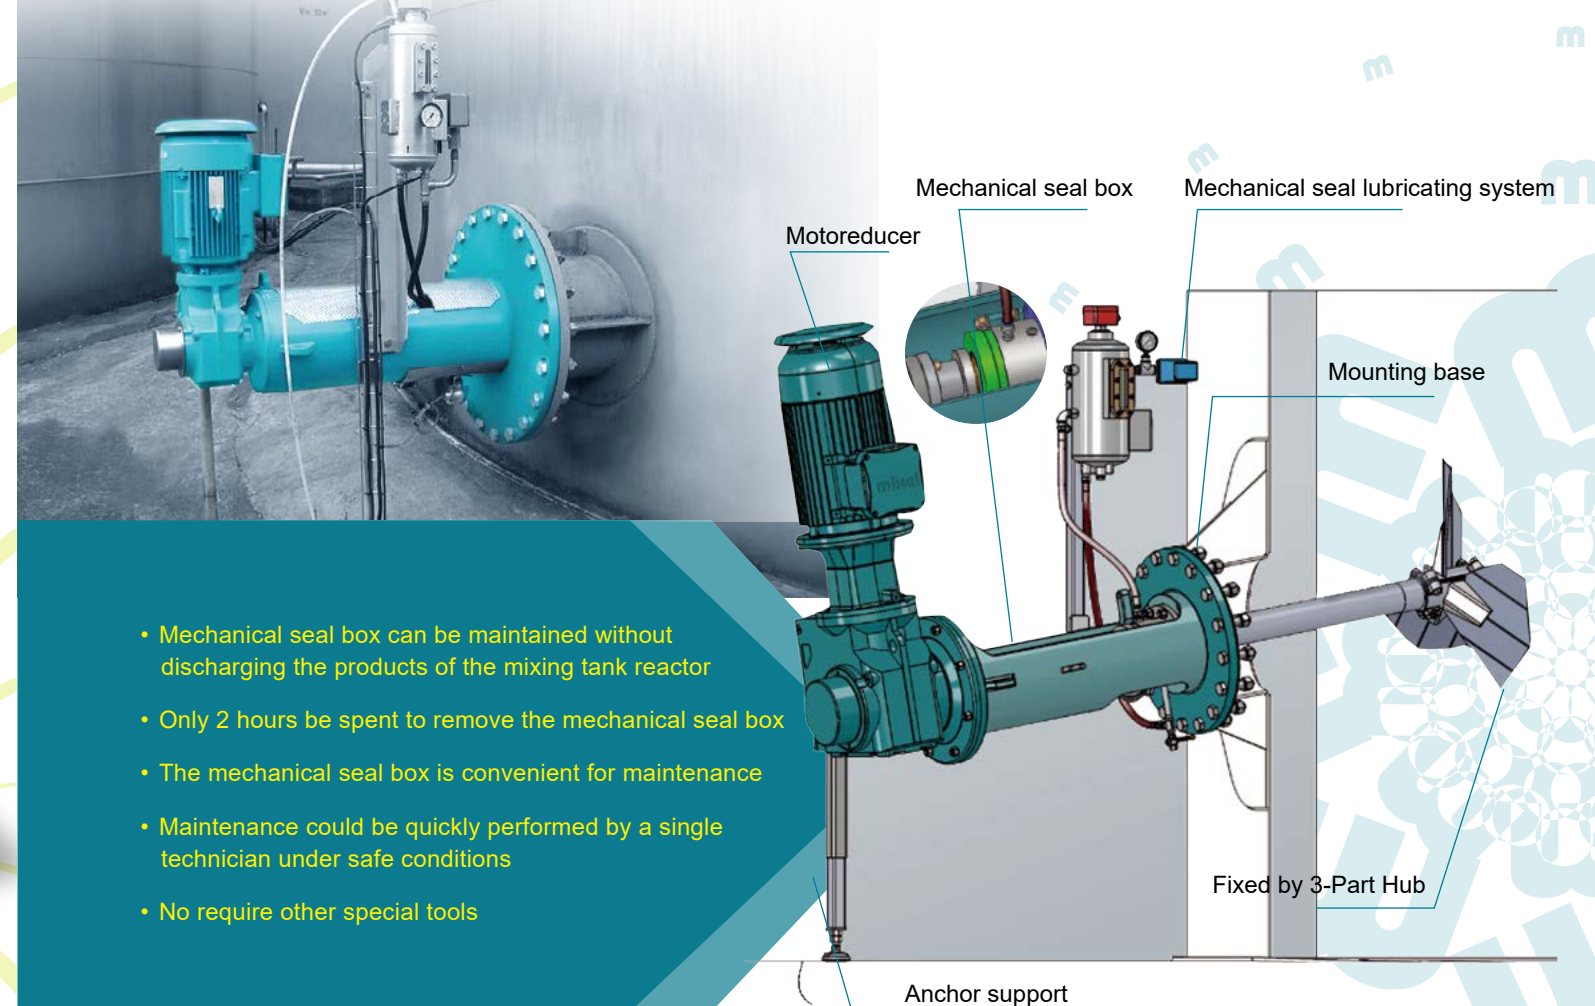

- Propeller mechanics analysis

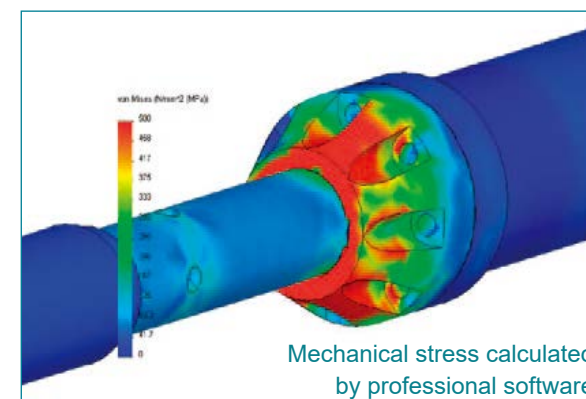


- Mechanics analysis of shaft joint

► Mixed products

- Hydrocarbons, oil additives, oils, food additives, paint and dye, industrial effluents

► Disassembly steps of sealing system under full tank

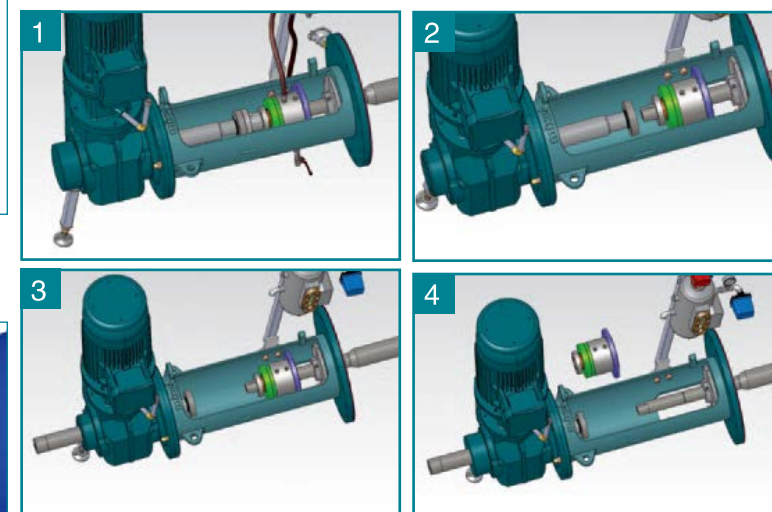

- 1 Remove the mechanical seal box, seal the mixing shaft with O-ring
- 2 Remove the short coupling from the mixing shaft
- 3 Move the mixing shaft outward to take out the mechanical seal box
- 4 Remove the mechanical seal box for maintenance